

## OPMT Machining Solutions for Ultra-hard Materials Industry

## Light 5X 40V


Vertical 5-Axis Laser Machining Center

© 2024 Guangdong Original Point Intelligent Technology Co., Ltd. All Right Reserved.

## With the laser into a new dimension of machining cutting edges of precision tools

Traditional processing methods such as grinding and corrosion often lead to the deterioration of the cutting edge quality of the tool, which in turn affects the processing accuracy and efficiency. In contrast, the innovative laser technology stands out with its unique advantages and wide application benefits. By adopting advanced ultra-precision lasers, not only the processing accuracy, processing speed and economic benefits are improved, but also green environmental protection is achieved. Since no consumables are required, the impact on the environment is greatly reduced.

At present, the main cutting tools used in the 3C industry are PCD/PCBN/CVD, which are mainly used for finishing of light, short, and small product shells and internal precision parts, such as mobile phones, tablet computers, electronic watches, etc. Laser technology can well solve the processing problems of traditional processing technology in processing large curvature surfaces and special-shaped contours of PCD/PCBN/CVD tools.

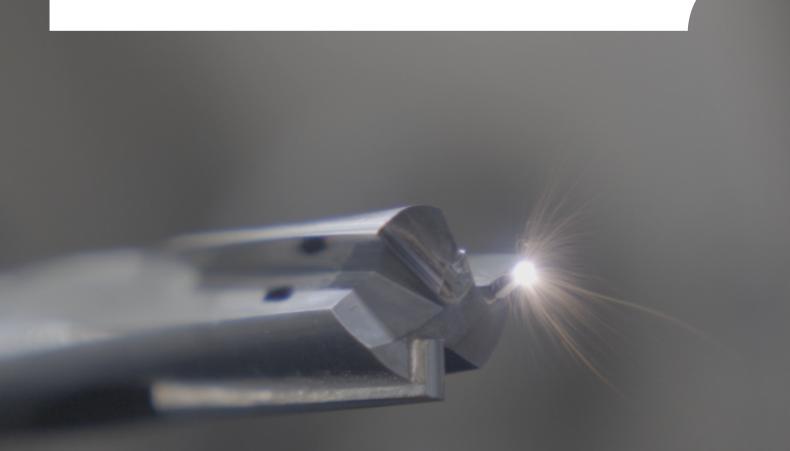


Applications and Parts				
Machine and Technology				

Technical Data

# Laser finishing of PCD/PCBN/CVD tools with accuracy ≤ 0.003mm

Processing tools display

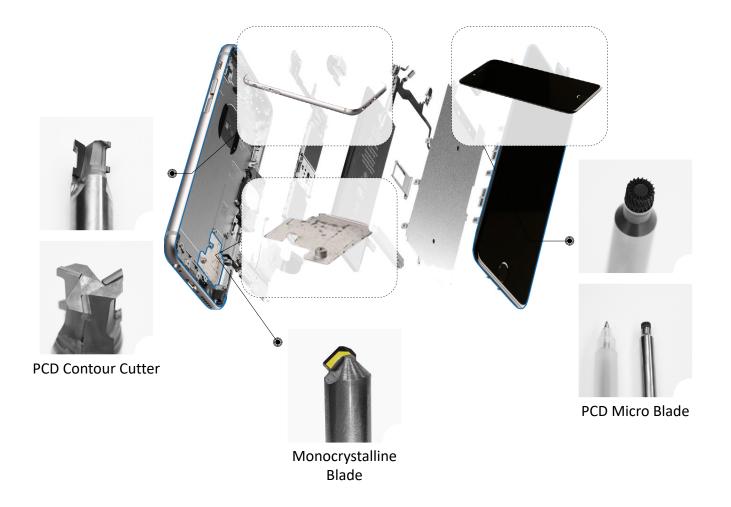


App	lications	and	Parts
-----	-----------	-----	-------

Technical Data

## PCD Contour Cutter





200X

cutting edge

Processing time: 51min37s

Processing accuracy: ±0.005mm Blade width: 0.2mm Relief angle: 12° Profile: 0.007mm Passivation value: 0.00465mm

## Monocrystalline Blade





Processing time: 4min26s Processing accuracy: ±0.008mm Blade width: 0.15mm Relief angle: 15° Profile: 0.007mm Passivation value: 0.00412mm





200X Straight cutting edge



100X-Chipping

#### Laser process:


1-200X curved edge/straight edge without chips
2-Processing accuracy in ≤ 0.003mm, tolerance stabilized in ≤ 0.001mm
3-Realizing RTCP 5-axis linkage
4-High consistent in lot production
5-Ability to process non-conductive materials, such as CVD. MCD

### Traditional EDM:

1-Chips and cracks may occur at the cutting edge during processing, resulting in increased costs and longer working hours. In severe cases, the blade needs to be replaced;

**2**-When processing large particles or polycrystalline diamond with poor conductivity, wire skipping will occur and machining can not be continued.


- High speed mode 3.0 = 200% faster and 50% lower costs per unit in comparison to the EDM
- Laser finishing of PCD tools with up to 3.0 mm/min
- Flexible machining of PCD, PCBN, CVD
- Individual cutting edge machining -negative chamfers, sharp cutting edge < 0.001mm</p>
- PERFECT CUTTING EDGES Complete machining including relief angle, chip breaker, defined cutting edge chamfering of ultra-hard materials
- High degree of flexibility, quick switching between different processing tasks
- Environmentally friendly, no cutting fluid required, reducing pollution

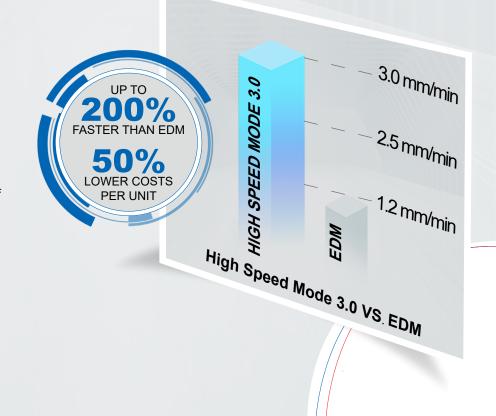

Technical Data

06

# Highly dynamic 5-axis laser precision machine with linear drives

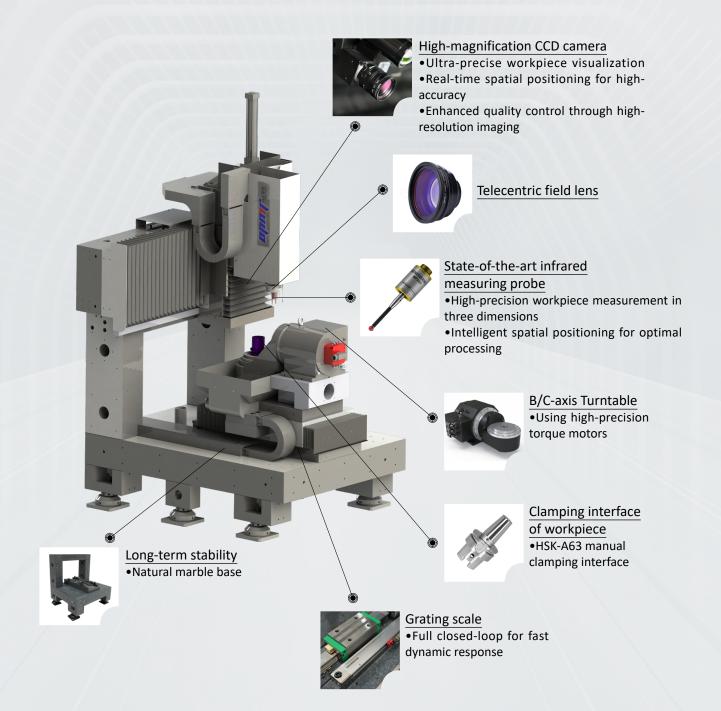

•The X/Y/Z linear axes utilize linear motors combined with roller guides, offering rapid response times and high precision. The positioning accuracy is  $\leq 0.005$  mm (5 microns).

# Technology features for an optimized process and the highest flexibility

#### Work area

•B-axis swing angle: ±120°



### Powerful and user-friendly NUM CNC control system

•Ensures maximum ease of operation and process reliability, combine high-tech performance with genuine customer benefits and ensure application-orientated, simple programming and operation

e∰ Fl	exium HMI											-	o ×
AUTO	M01 /	mm VALID I	DHLD CKNW HLC CH 1								ип	10	o <sup>®</sup> <sup>sF1</sup> Prod
				Prod							fle <mark>x</mark> iur	n <b>*</b> 68	A 3F2
		Pos. OP	Delta	60	<b>é</b> Spir	ndle not	t availat	le					Prog
	х	275.0866	0.0000		• <u> </u>								Tool
	Y	108.7996	-88.5996	1			polation mm/min		edrate surrent :	0.0000 r	nm/min	120%	Work SF4
	z	154.9811	0.0000		am %1 me 47 s		5						Variable
	в	-76.0000	0.0000	NC B Tool Req.1		N0 - -		C	orrecto irection rogram		D1 R+ Abs		Diag sP6
	с	0.0000	0.0000	Plane Comp	ensatio	۲-۲ n Of			oolant ikip Lev	el	0000	0001	<sup>177</sup>
%1													Service
19 20 21 22 23 24	G01 X175.54 G01 C351.40 G01 Z44.694	22 25 3		G01 G57 G73	G04 G504 G999 M00	G38 G94 M09	G09 G10	G17 G97 G16 M48 M07	G90 G30 G51 M06 M08	G71 G12 M19	G52 G24 G80	G40 G26 M61 M253	MchPage8
	elp Fi ^ Fi Functio	P2 P3 OM/OP	F4 Delta/Lag	Axes	F6	locks	Axisi	nfo	DuplAxi		indle		Mode

•The open universal CNC system can meet various machine tool applications such as turning, milling, planing, grinding, laser, water jet, etc.

•The core of the CNC system is NCK, each NUM<sup>®</sup> system composed of 8 NCKs, each NCK provides up to 32 axes/spindles, and provides up to more than 200 axes/spindles, and is compatible with RTCP.


Applications a	nd Parts
----------------	----------

#### Technical Data

08

## User-friendly GTR cutting tools software - the easiest entry from EDM to laser machining


#### 3D machining path planning CAM software

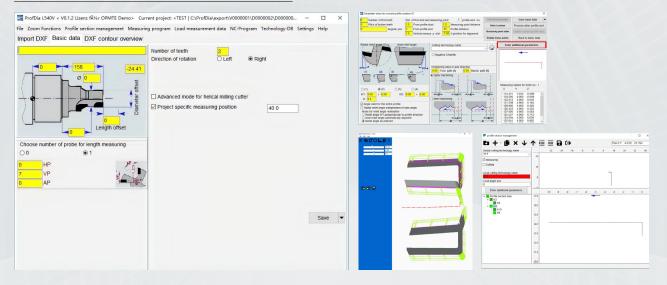

- Use of industry standards as programming solutions allows the importation of existing EDM projects
- Minimal training required when switching from EDM to lasers
- Parameterized software for rotary or fixed tools
- Import of tool geometry as DFX file
- Automatic 3D measurement of the PCD surface
- Automatic program generation
- ③ 3D simulation directly at the machine

# Undergoes rigorous testing and calibration to maintain high precision and reliability















- 1 X/Y/Z-axis parallelism accuracy detection
- 2 B/C-axis parallelism accuracy detection
- 3 Precision line parallelism accuracy detection
- 4 Ballbar
- 5 Alignment laser
- 6 Rotary axis calibrator
- **7** Laser beam profiler
- 8 Laser interferometer

<u>09</u>


## **Perfect cutting edges**

Complete machining including relief angle, chip breaker, defined cutting edge chamfering of extremely hard materials.



## **Overview of the Light 5X 40V**

Machine dimensions	Unit	Light 5X 40V
Floor space (L x W x H)	mm	1700 x 1900 x 2600 (incl. 2700 x 1900) accessory
Weight	kg	3500

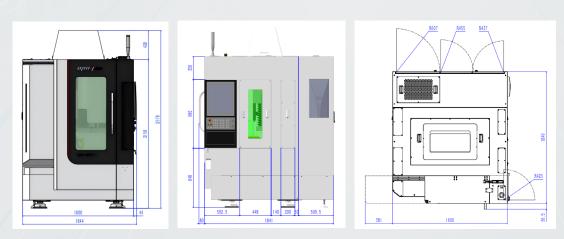

App	lications	and	Parts
-----	-----------	-----	-------

#### Technical Data


## **Overview of the Light 5X 40V** - Technical data

Travel	Unit	Light 5X 40V
X-axis (left and right along the sliding plate)	mm	400
Y-axis (forward and backward the workbench)	mm	250
Z-axis (up and down the laser head)	mm	300
Workbench		
Dimensions of the horizontal workbench	mm	500 x 500
Load capacity of the horizontal workbench	kg	100
Dimensions of the C-axis workbench	mm	ф100
B-axis swing angle	o	±120°
B-axis rated/max. speed	rpm	100/150
C-axis rated/max. speed	rpm	200/300
Max. load capacity of the C-axis workbench	kg	10
Feed rate		
Cutting speed	m/min	20
X/Y/Z-axis rapid traverse speed	m/min	30
Accuracy		
X/Y/Z-axis positioning accuracy	mm	0.005
X/Y/Z-axis repeat positioning accuracy	mm	0.003
B/C-axis positioning accuracy	п	10
B/C-axis repeat positioning accuracy	"	5
Laser		
Pulse width	//	ns
Power	W	100
Machining range		
Max. tool diameter	mm	φ100mm(φ200 in special shape )
Max. tool length	mm	200
Max. tool weight	kg	8
Clamping interface of workpiece		HSK-A63 manual clamping interface
Power		
Power supply voltage	V	AC380V±10%
Electric capacity	KVA	23
Air supply		
Air supply pressure	Мра	≥0.7MPa
Air supply flow rate	L/min	≥500L/min

\_11

## Obtained RoHs certification, ISO14001 and ISO45001 management system certification



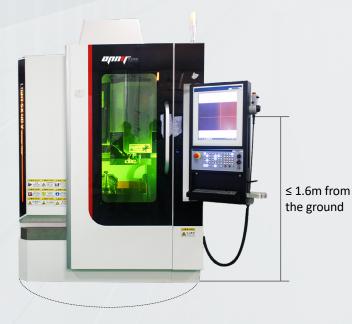

#### Dedicated protective glass

The machine operation interface and the protective window are in the same direction which is convenient to operate. The protective window adopts special design to prevent burns from the laser light source and facilitate monitoring of the processing process.

#### Laser CNC machine tool safety lock device

Effectively improve the safety of operators and maintenance personnel, reduce the risk of personal injury, and reduce facility maintenance costs.

### Ergonomic structural design

The operator adjustment space is within 1.6m from the ground.

# Turnkey provider with impressive technology expertise

Cover 30, 000 m<sup>2</sup>, 210 employees, multi-axis CNC laser machine manufacturer, and provide smart factory manufacturing solution



Factory in Foshan, Guangdong, China



Factory in Foshan, Guangdong, China





## **300<sup>+</sup>** Patents

302 patents for inventions, utility models, etc.
62 invention patents,
147 utility model patents,
17 exterior design and
9 software

## **113** R&D Employees

54% total employees
7 PH.Ds
7 Masters,
65 Undergraduates, covering talents in various fields such as Laser application, Mechanics, Electrics and Software

## 5 R&D Centers & Labs

Provincial Manufacturing Innovation Center, Engineering Technology Research Center, Ultrafast Laser Processing Joint Laboratory, Foshan Postdoctoral Workstation, Graduate Student Joint Training Demonstration Site

### EASY MAINTENANCE

Use high-end international universal accessories

### FLEXIBLE CUSTOMIZATION

Customized base on customer needs

### TRAINING PROGRAM

Provide operation training



## Guangdong Original Point Intelligent Technology Co., Ltd.

To make manufacturing smarter and intelligent manufacturing easier

Adress: No.3 Lizhong Road, Danzao Town, Nanhai District, Foshan, Guangdong, China

September 2024 edition



From origin to infinity